


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
A		CH'D ENGRAVE NOTE P/N -1, CH'D DWG NO. FROM RBE M/R BOLT HOLDING TOOL, ADDED POWDER COAT SPEC FROM ORIGINAL PICTURE.	6/1/2009	RJC	-
2	16-0012	UPDATED TO NEW STANDARDS. -1 CH'D ENGRAVE NOTE TO INK STAMP. CH'D POWDER COAT SPEC WAS T-6920 S9 IS FED #13538.	2/2/2016	DPD	JAG


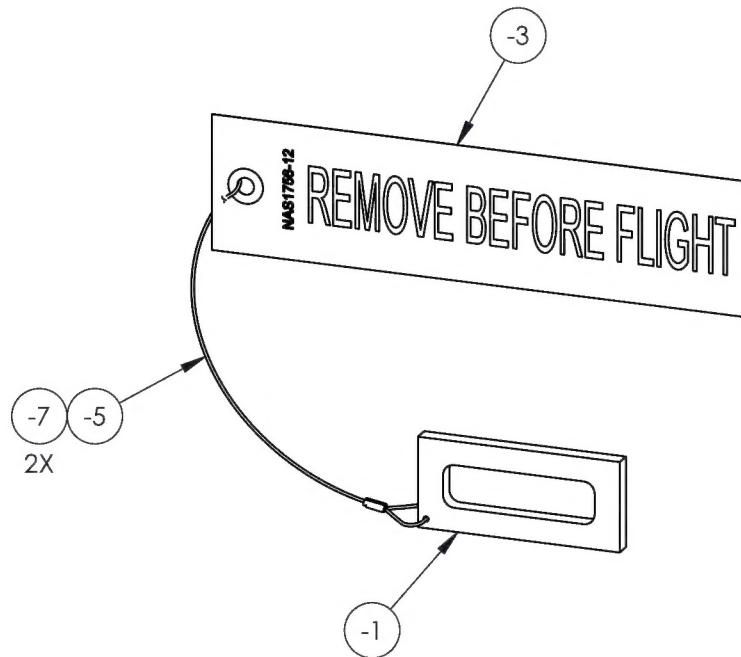


ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
			-1	1	PLATE	A36/1018/1020 HR		2
		B/O	-3	1	FLAG "REMOVE BEFORE FLIGHT"	NYLON	NAS 1756-12	1
		B/O	-5	1	CABLE	COATED STEEL	Ø1/16 X 12 (CARR LANE #CL-2-C)	1
		B/O	-7	2	FERRULE	ALUMINUM	Ø1/16 X 3/8 (MCMASTER-CARR #3896T31)	1

<b>DART AEROSPACE</b>	
TITLE <b>M/R SLEEVE BOLT HOLDING TOOL</b>	
DWG NO. <b>RBE672658</b>	REV <b>2</b>
MAT'L SPEC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± .5° .X ± .1 SURFACES = 125°
DRAWN BY: PERRITT	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R
CHECKED: CLOUGH	2. DIMENSIONAL LIMITS APPLY AFTER PLATING
OPPS APPR: ANDERSON	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
QA APPR: LINDSAY	USED ON MODEL
APPROVED: GILBERT	EUROCOPTER AS350A
SCALE 1:4	DATE 10/28/2008
SHEET 1 OF 2	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
A		CH'D ENGRAVE NOTE P/N -1, ADDED POWDERCOAT SPEC FROM ORIGINAL PICTURE.	6/1/2009	RJC	-
2	16-0012	-1 CH'D ENGRAVE NOTE TO INK STAMP. CH'D POWDER COAT SPEC WAS T-6920 S9 IS FED #13538.	2/2/2016	DPD	JAG

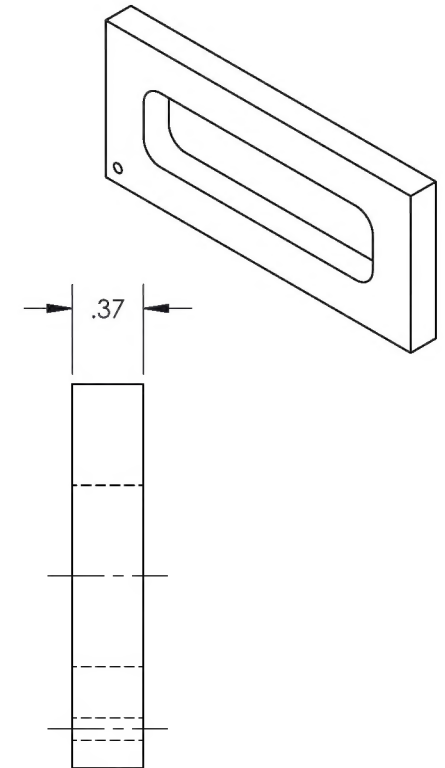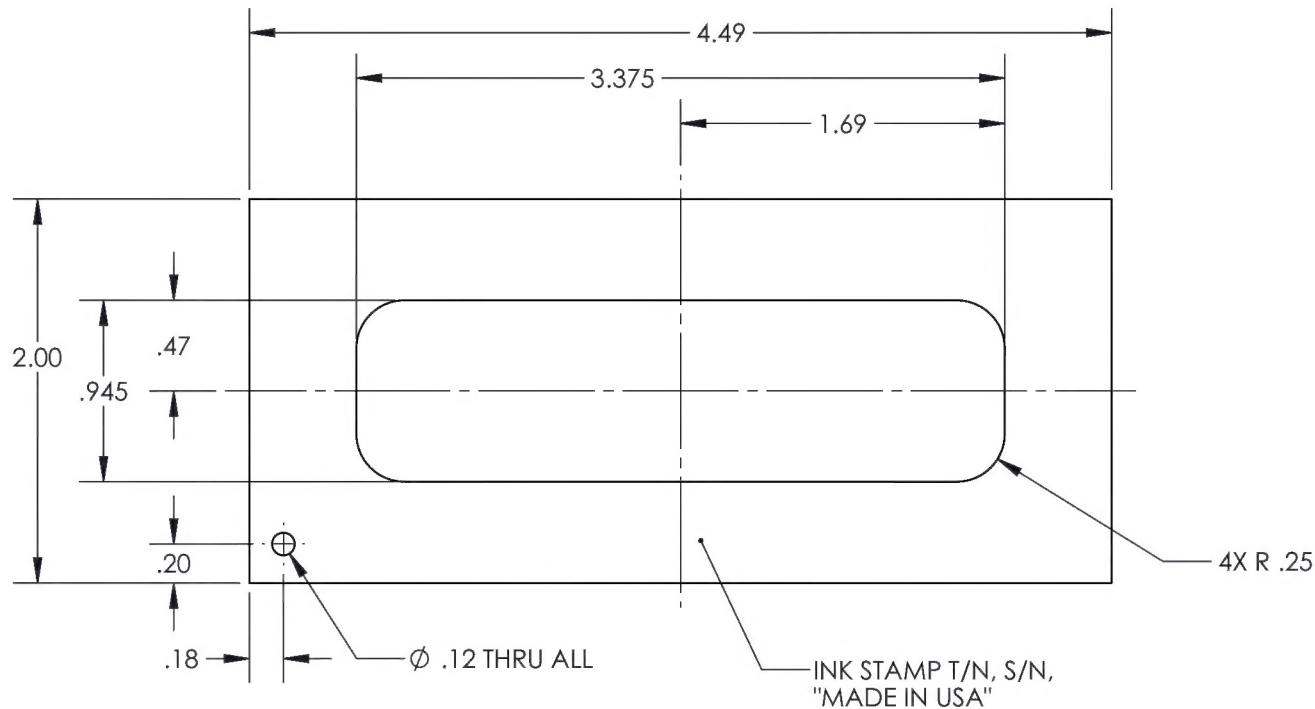

(-1)  
PLATE

<b>DART AEROSPACE</b>	
TITLE <b>M/R SLEEVE BOLT HOLDING TOOL</b>	
DWG NO. <b>RBE672658-1</b>	REV <b>2</b>
MAT'L A36/1018/1020 HR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
HEAT TREAT	.XXX $\pm$ .005 FRACTIONS $\pm$ 1/8
FINISH POWDER COAT YELLOW	.XX $\pm$ .01 ANGLES $\pm$ 5°
SPEC FED #13538	.X $\pm$ .1 SURFACES = 125°
DRAWN BY: PERRITT	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R
CHECKED: CLOUGH	2. DIMENSIONAL LIMITS APPLY AFTER PLATING
OPPS APPR: ANDERSON	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
QA APPR: LINDSAY	USED ON MODEL
APPROVED: GILBERT	EUROCOPTER AS350A
SCALE 1:1	DATE 10/28/2008
SHEET 2 OF 2	